

PRODUCT DATA SHEET

Charging Locker



Product Specification :

- Single lockable slim door with 3-point locking mechanism.
- Optional other locks.
- 20 fixed shelves.
- Power Distribution : 1 x 3-point and 1 x schuko white socket per bay, 220 Volt AC.
- 1pcs 2P circuit breaker.
- Adjustable feet and castor are available simultaneously.
- Efficient baying and earthing kit of cabinet.
- Assembled weight of charging locker : 145Kg.
- Thickness : Frame 2.0mm, door 1.6mm.

Specifications

Standard :	Comply with ANSI/EIA RS-310-D, IEC297-2, DIN41491, PART1, DIN41491, PART7, ETSI
Material :	SPCC cold rolled steel
Loading Capacity :	Static loading : 300 Kg (on the adjustable feet)
Rating :	IP20
Surface Finish :	Degreasing, Picking, Phosphating, Powder Coated
Packaging :	Flat Packed or Assembled

Size


Width :	605mm
Height :	2015mm
Depth :	400mm

Part Numbers

Model No :	Description :
G6-CL-20S/220	605 x 400 x 2015 20-Bay Shared Charging Locker

PRODUCT DATA SHEET

Charging Locker

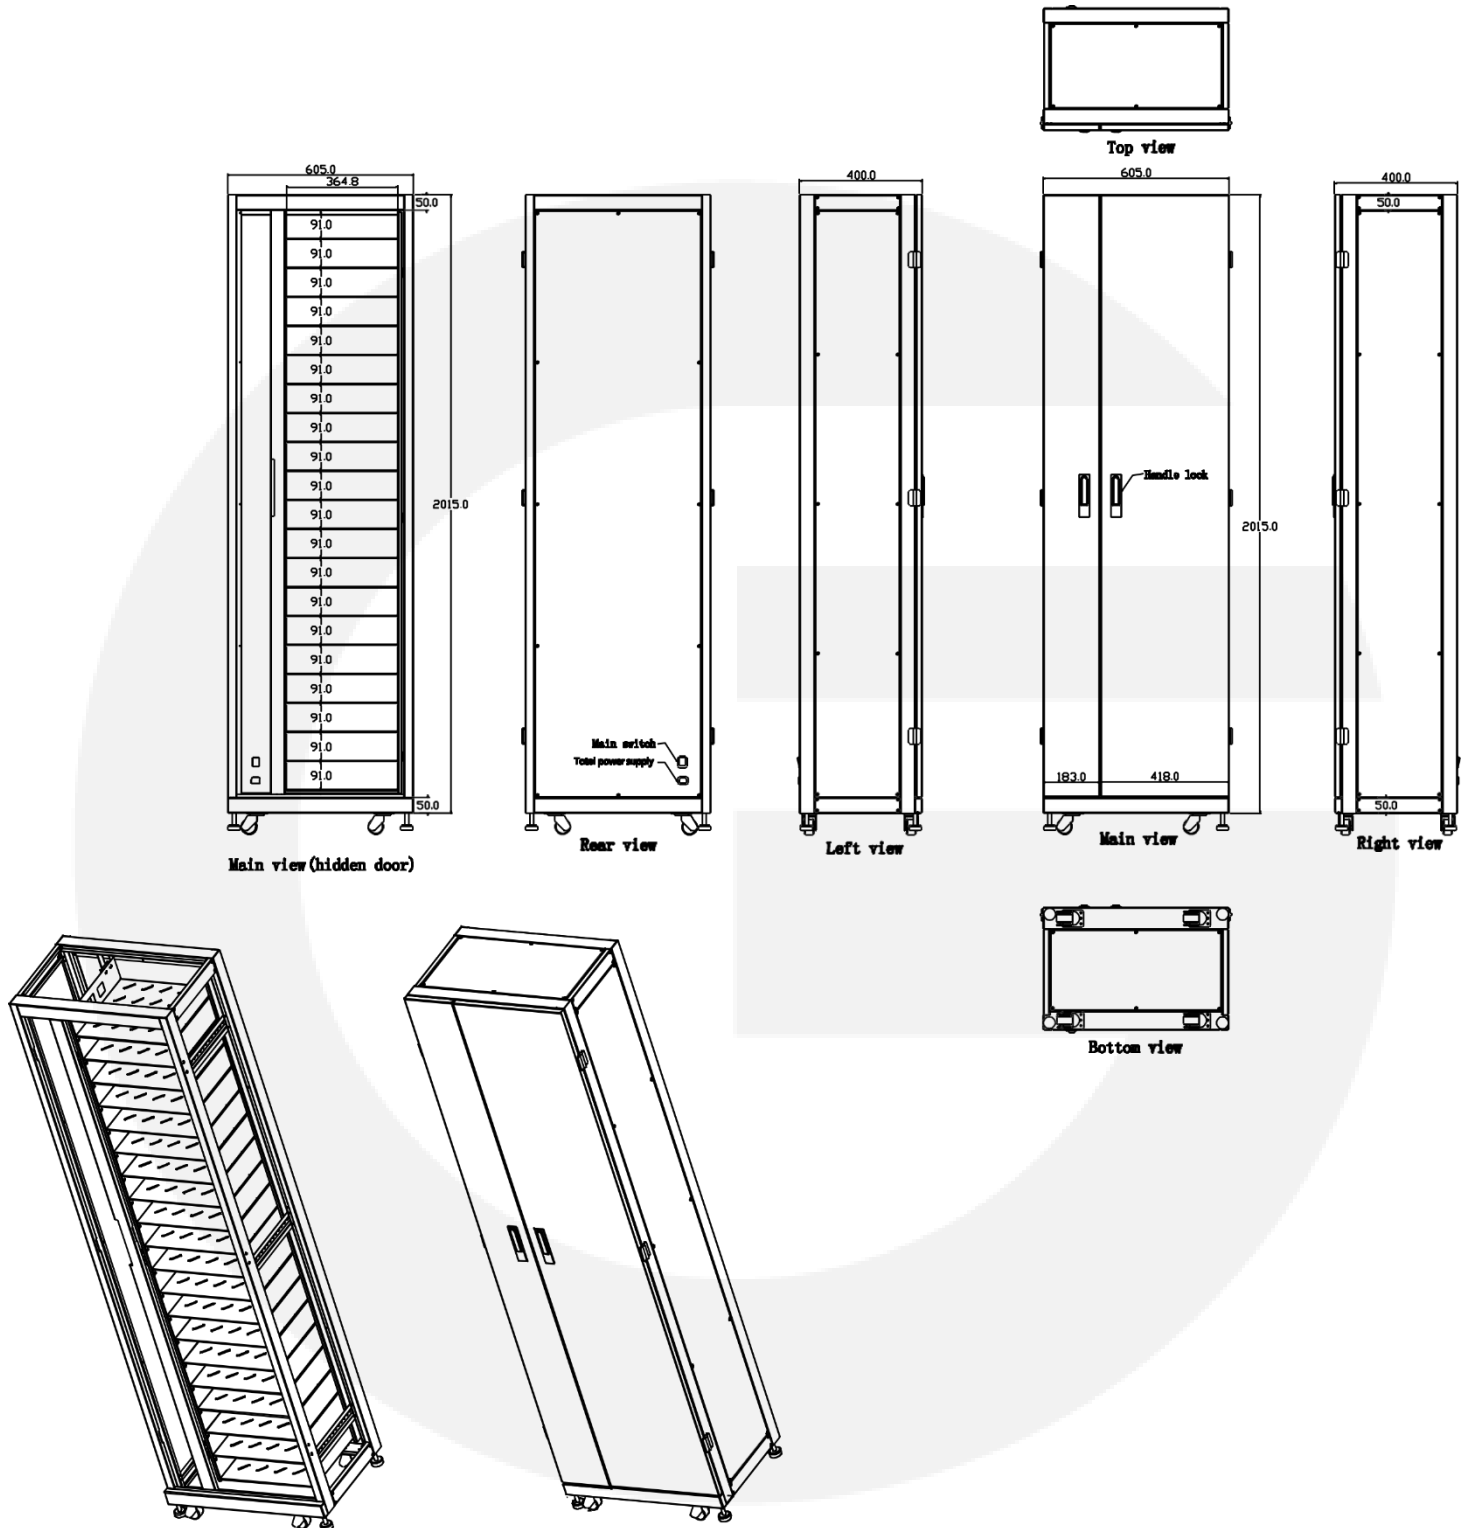

Globalsix - Johannesburg

82 Schooner Street,
Laser Park,
Johannesburg,
South Africa

Contact No : +27 (0) 11 794 8301

Globalsix - Cape Town

Unit 1, Garnet Park,
6 Drill Avenue,
Montague Gardens,
Cape Town

Contact No : +27 (0) 21 555 2594